


XMI209 XML209 LED Exit & Emergency Light

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

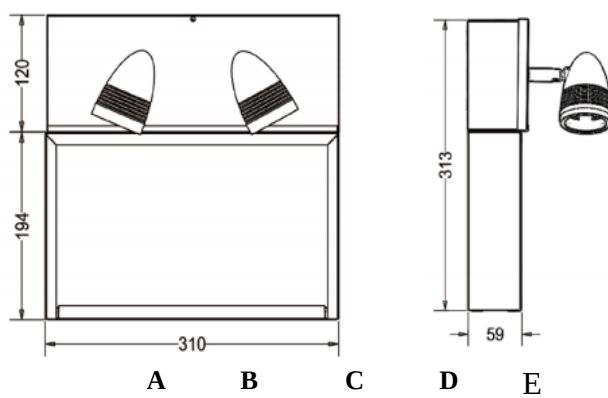

Item No.:XMI209 XML209

Description

- 1) 20 Gauge steel housing
- 2) AC-Only or self-powered models.
- 3) 120V/347V AC operation.
- 4) Long-life, energy-saving LED technology.
- 5) Power-on LED indicator Light and push-to-test switch.
- 6) Comes standard with two pictogram films per face,
for direction selection
- 7) Low volt battery disconnection-preventing deep
discharge damage to the battery.
- 8) Universal canopy available.
- 9) Universal knockout chevrons.
- 10) Innovative, snap-together design allows for fast installation
- 11) UL listed.
- 12) Warranty-2 years limited warranty.

Housing Colour

WH / BK

Mounting

Universal (wall, side or ceiling mounting)
Key hole slots are stamped into the backplate

	A	Series
XMI209 XML209		Exit Combo

	B	Sign
		Exit Sign
	R	Running

	C	Input Voltage
		120V
	347	347V

	D	Face Q'ty
	SF	Single Face
	DF	Double Face

	E	Battery Backup
		Battery Backup
	AC	AC Only

Lamps

LED 2x3W Max.

Battery

Lead-Calcium battery (6v 4.5Ah)

The sign is designed with a maintenance free
Self-Powered model delivers standard two hours of
back-up lighting

Recharge time of the battery is twenty-four (24) hours.

Warranty

2 years limited warranty.

F	Housing Color
BK	Black
WH	White

G	Arrow Direction
	No indicators
LA	Left indicator
RA	Right indicator
UA	Up indicator
DA	Down indicator
URA	45 °up right
DRA	45 °down right
ULA	45 °up left
DLA	45 °down left



EXIT & EMERGENCY LIGHT

