



4 Inch


9W SLIM PANEL LIGHTS SPECIFICATION



Detail Description:



Drawing

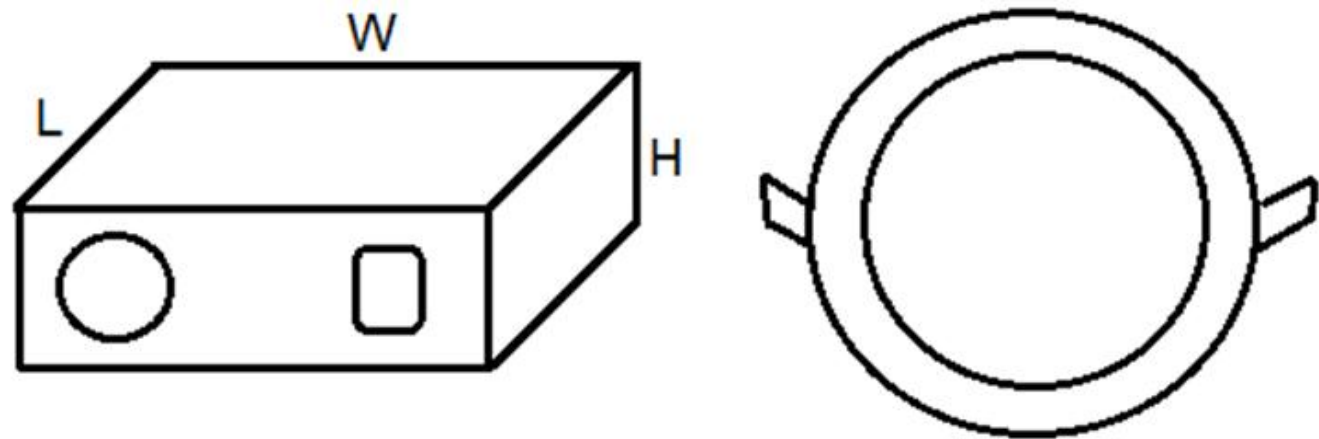

Type	Value
Outer Diameter	120mm
Cut Hole	100mm
Height (Panel)	8mm
Height (Junction Box)	33mm
Length (Junction Box)	85mm
Width (Junction Box)	90mm

Parameters


Electrical Characteristics	
Input Voltage	AC110-120V AC 50~60Hz
Rated Power	9W
Installation of LED Driver	External
Type of LED Driver	Constant current output
Power Factor	0.95~0.98

Optical Characteristics	
LED Type	SMD2835
Brand of LED Chip	Taiwan Epistar
Lumen	985-1050
Eifficiency	125lm/W
CRI	>80
Beam Angle	180 degree
CCT	3000K/4000K/ 5000K/ 6000k


Other	
Energy Level	A
Warranty	5 years
Working Hours	50,000hrs
IP range	IP44
Material	Aluminum housing with PMMA lampshade
Installation Type	Recessed
Accessories	Mounting clips

Installation


Turn off the switch before application

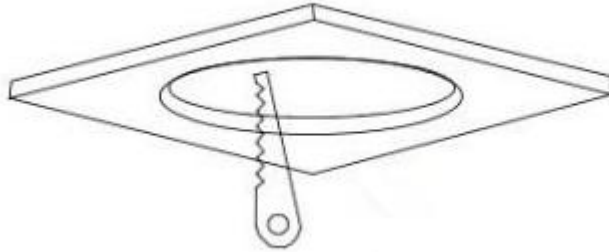

1- drill on the ceiling;

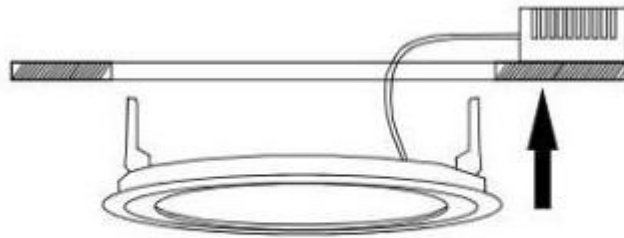

3- straight the spring,
then put into the hole;

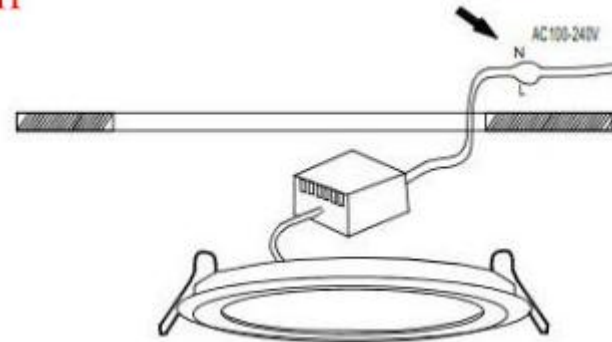

2- connect with the driver,
make the insulation measure;




4- finished.

Application

- 1- office, factory, warehouse, parking lot;
- 2- market, school, library, hospital, museum;
- 3- home lighting;



Certification:

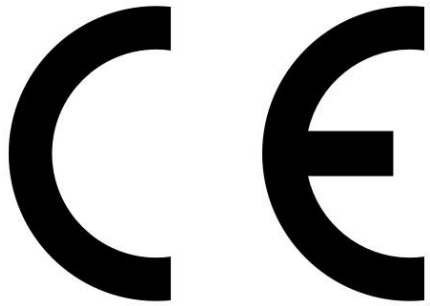

E479399

Color Packages:

Note: It can be also made according to the instruction of Customers with their Logo and Brand.

