


LED Linear Strip Series

Wattage & CCT Selectable

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W

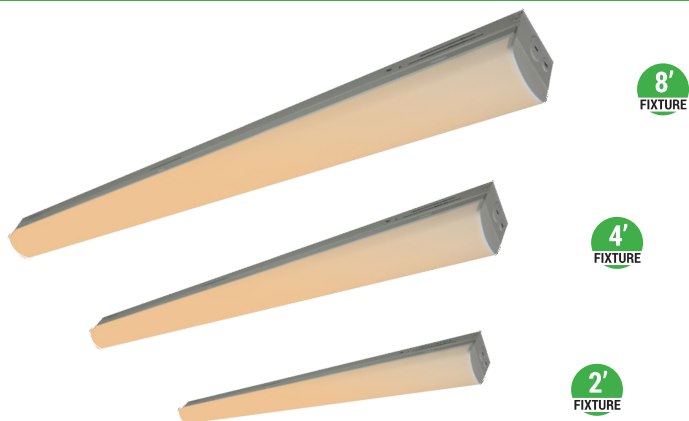

The Linear Strip Series can be widely used for indoor (damp locations) Excellent for hospitals, schools, shops, restaurants, storage rooms, supermarkets, etc.



FEATURES

- Luminous part is integrated and fastened to fixture body by snap-locks.
- End-caps adopt integrated bending technique.
- Field-adjustable light output and CCT.
- Bi-level motion sensor or battery backup available.

WATT/CCT
FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation



Buckle design, Convenient disassembly and assembly

SPECIFICATION			
TYPE	WSD-ST2FT152025W27-3545K	WSD-ST4FT253040W27-3545K	WSD-ST8FT556065W27-3545K
WATTAGE	(2FT) 15W/20W/25W	(4FT) 25W/30W/40W	(8FT) 55W/60W/65W
LUMEN	2087 lm/2810lm/3412lm	3250 lm/3900lm/5200lm	7150 lm/7800 lm/8450 lm
EFFICACY	≥130 lm/W		
CCT	3500K/4000K/5000K		
DEFAULT SETTING	20W&4000K	30W&4000K	60W&4000K
CRI	80		
INPUT VOLTAGE	AC120-277V		
LIGHT ANGLE	112°		
POWER FACTOR	0.90		
DRIVER EFFICACY	86%		
DIMMING	1-10V Dimming		
WORKING TEMPERATURE	-4°F ~ 122°F		
LIFESPAN (L70)	100,000 hours		
PROTECTION LEVEL	Damp locations		
CABLE	NO CABLE		
WARRANTY	5 year limited		


LED Linear Strip Series

Wattage & CCT Selectable

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W

DIMENSION

Unit:mm/inch

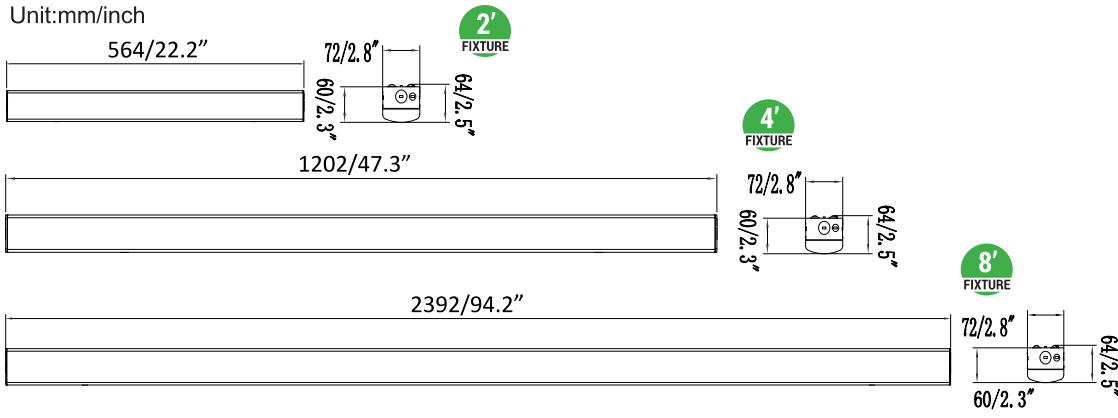

WATTAGE	15W/20W/25W
GR. WEIGHT	2.65 lbs (6 pcs/carton)
BOX DIM.	25.63" x 9.84" x 5.98"

WATTAGE	25W/30W/40W
GR. WEIGHT	4.41 lbs (6 pcs/carton)
BOX DIM.	50.59" x 9.84" x 5.98"

WATTAGE	55W/60W/65W
GR. WEIGHT	8.49 lbs (4 pcs/carton)
BOX DIM.	98.03" x 6.89" x 5.91"

EMERGENCY BACK-UP (SOLD SEPARATELY)



BLD-CM20N-480800-8W
8W Emergency Backup Battery
LED Driver

BLD-CM20N-480800-15W
15W Emergency Backup Battery
LED Driver

CONTROL (SOLD SEPARATELY)



BRI810-B-M10-BLE
Bluetooth Microwave Motion
Sensor



BRI810-B-M10
Microwave Motion Sensor



RC-100
Microwave Sensor
Remote Controller

STANDARD ACCESSORIES(standard)



1.2M CABLE
(2FT,4FT,8FT)



J-BOX COVER
(2FT,4FT,8FT)



V-HOOK
(2FT,4FT,8FT)


STANDARD ACCESSORIES(SOLD SEPARATELY)



SURFACE MOUNTING KIT(4FT,8FT)
(2FT,4FT,8FT)



LINKABLE KIT(4FT,8FT)
(2FT,4FT,8FT)



WIRE GUARD(4FT,8FT)
(2FT,4FT,8FT)

ORDERING INFORMATION

EXAMPLE:

WSD-ST2FT152025W27-3545K / WSD-ST4FT253040W27-3545K / WSD-ST8FT556065W27-3545K

WSD	ST	2FT	152025	27	3545K
PRODUCT	PRODUCT	SIZE	WATTAGE	VOLTAGE	CCT
WSD (WSD LED INC)	ST (Linear Strip Light)	2FT (2-foot)	152025W - (15W/20W/25W)	27 - (120-277V)	3545K - (3500K/4000K/5000K)
		4FT (4-foot)	253040W - (25W/30W/40W)		
		8FT (8-foot)	556065W - (55W/60W/65W)		

LED Linear Strip Series


Wattage & CCT Selectable

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


PHOTOMETRICS

For complete IES files, please visit our website.


WSD-ST2FT152025W27-3545K (25W&3500K)

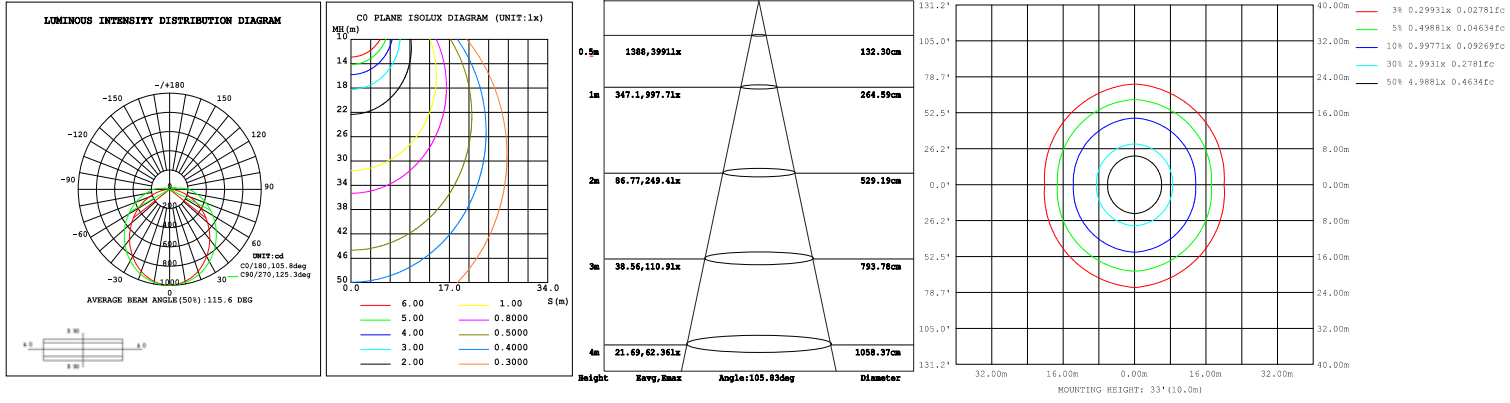

WSD-ST2FT152025W27-3545K (25W&4000K)

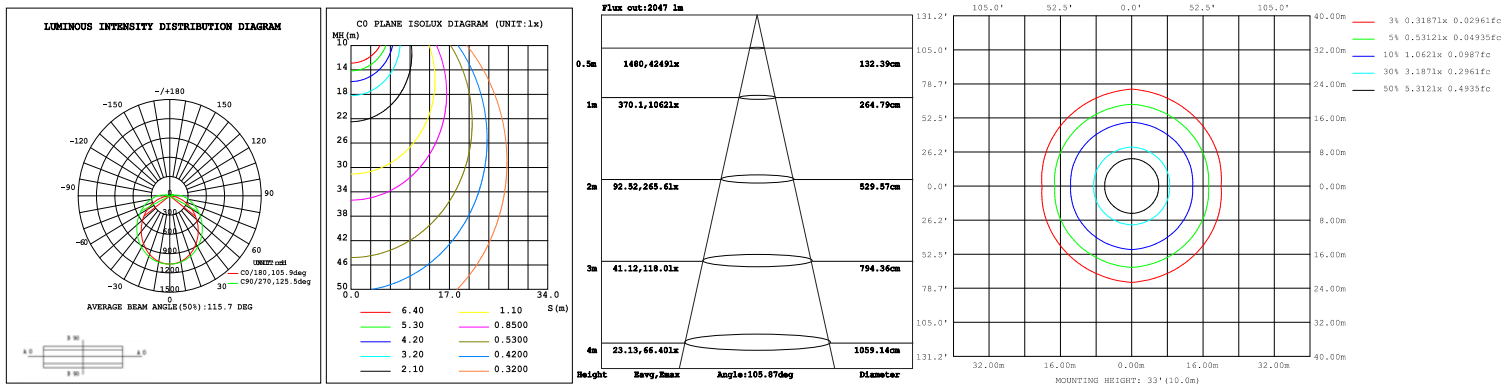

WSD-ST2FT152025W27-3545K (25W&5000K)

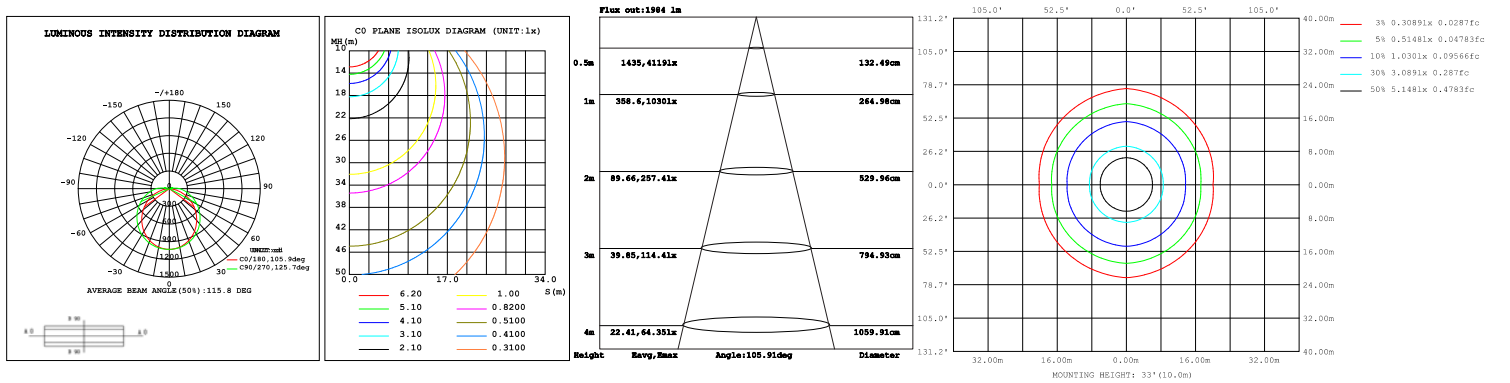

LED Linear Strip Series


Wattage & CCT Selectable

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


PHOTOMETRICS

For complete IES files, please visit our website.


WSD-ST4FT253040W27-3545K (40W&3500K)

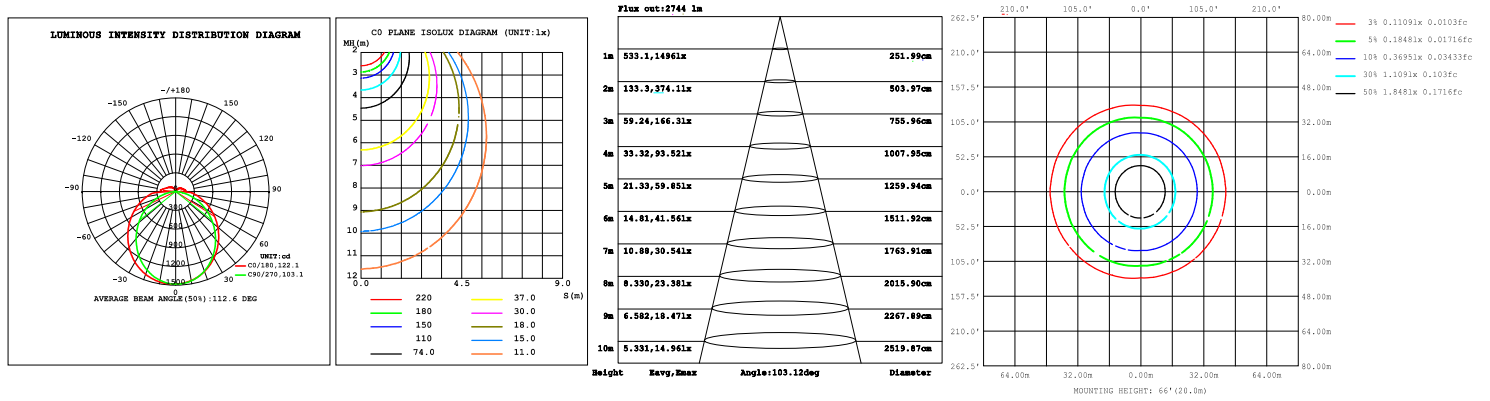

WSD-ST4FT253040W27-3545K (40W&4000K)

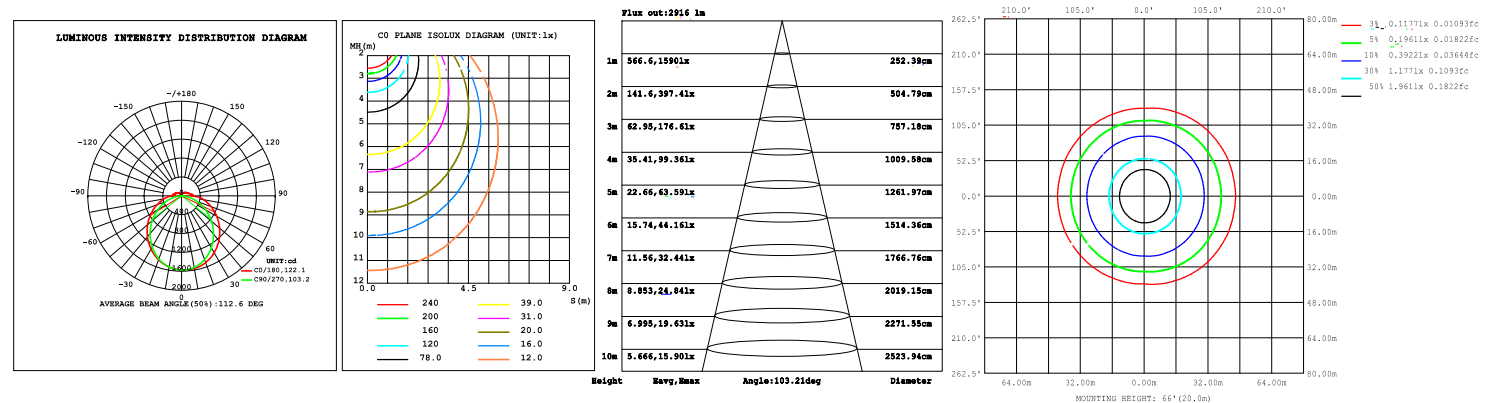

WSD-ST4FT253040W27-3545K (40W&5000K)

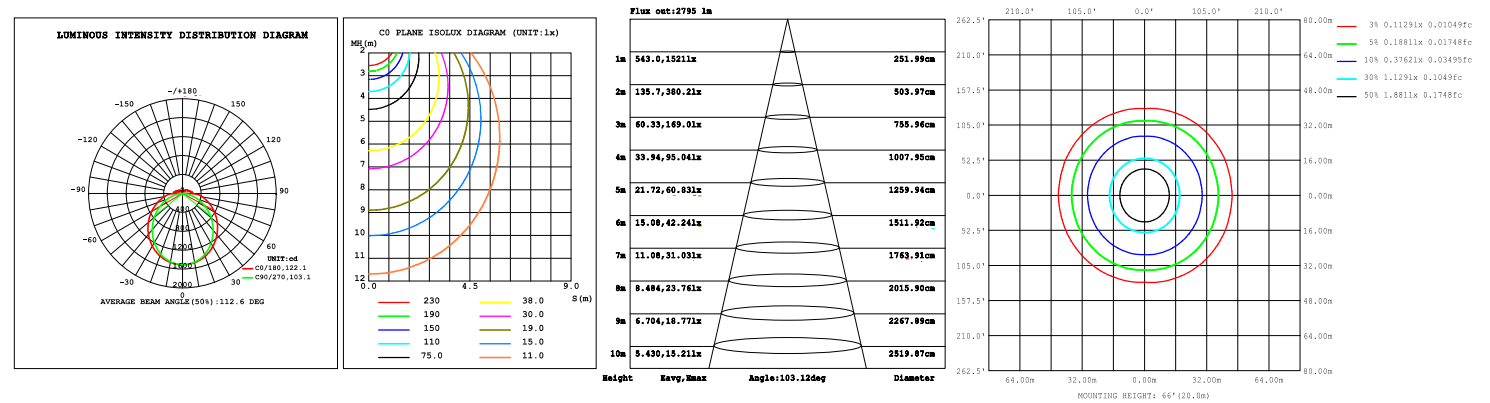

LED Linear Strip Series


Wattage & CCT Selectable

Tunable Wattages:(2FT)15W/20W/25W ; (4FT)25W/30W/40W ; (8FT)55W/60W/65W


PHOTOMETRICS

For complete IES files, please visit our website.

WSD-ST8FT556065W27-3545K (65W&3500K)

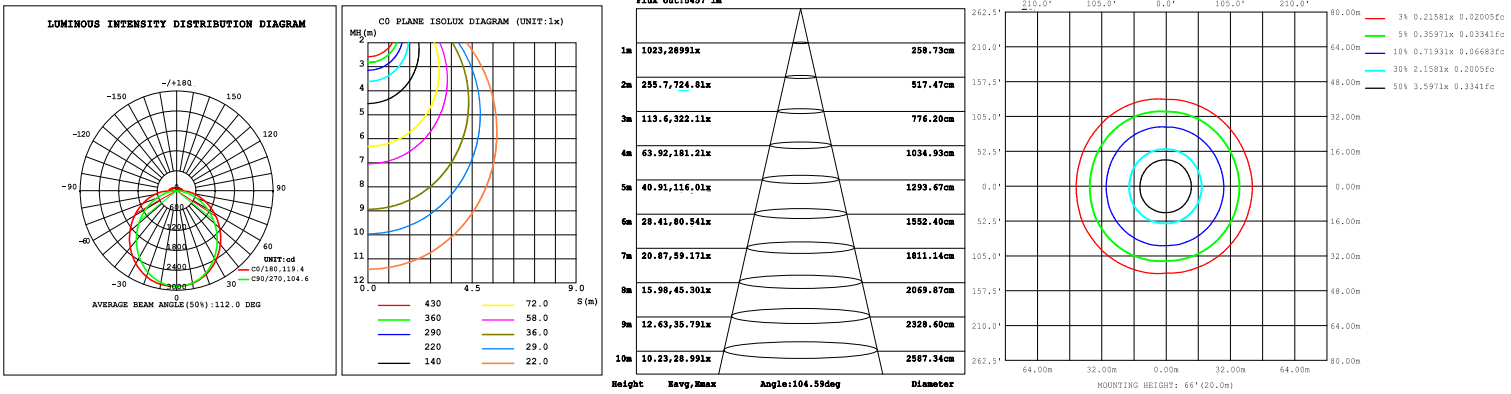

WSD-ST8FT556065W27-3545K (65W&4000K)

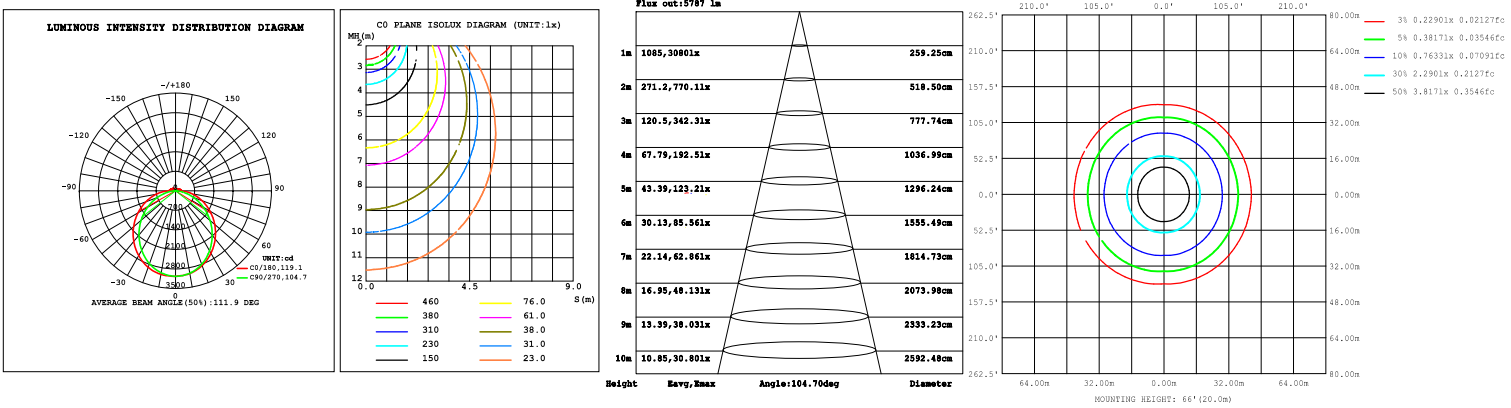

WSD-ST8FT556065W27-3545K (65W&5000K)

